



## Product Technical Info

### CLUTCH KITS

**CLK9100.04 - CLK9101.04 - CLK9109.04 - CLK9177.04**

INFORMAZIONE PRODOTTO	PRODUCT INFORMATION
<p>Vi informiamo sulla corretta modalità di installazione dei Kit Frizione in oggetto per evitare possibili vibrazioni o rumorosità anomale.</p> <p>Sul <b>coperchio dello spingidisco frizione</b> (esempio Fig.1) e sul <b>volano</b> (esempio Fig.2) sono riportati dei segni di colore verde come riferimento per il corretto allineamento dei due componenti.</p> <p>Al momento del montaggio prestate attenzione a mantenere allineati i due segni di colore verde (esempio Fig.3) ottenendo così la <b>migliore equilibratura</b> durante il funzionamento della frizione.</p>	<p>We inform you about the correct procedures for installing the clutch kits in object to avoid potential noise or vibration.</p> <p>On the <b>clutch pressure plate cover</b> (example Fig.1) and on the <b>flywheel</b> (example Fig.2) were marked signs of green color as a reference for the correct alignment of these two components.</p> <p>Please, pay attention during the installation to keep aligned the two signs of green color (example Fig.3) to get the <b>best balancing</b> when the clutch kit is working.</p>

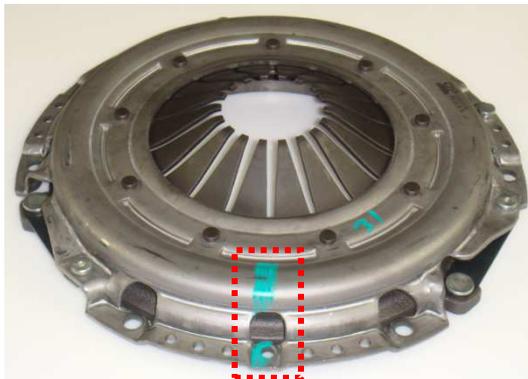


Fig.1



Fig.2

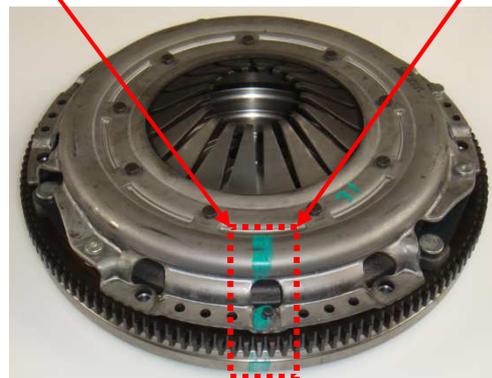


Fig.3

I suggerimenti e/o lo schema di montaggio eventualmente presente sono solo a titolo indicativo. La EXO Automotive Spa non si assume alcuna responsabilità derivante da eventuali errori e/o omissioni e/o modifiche successive apportate al sistema da parte del Costruttore del veicolo. Si consiglia altresì di avvalersi dei dati aggiornati forniti da quest'ultimo.

Recommendations and/or assembly diagram shown here are only for explanation purposes. EXO Automotive Spa doesn't accept any responsibility due to any later error and/or omission and/or modification made by the vehicle manufacturer to the system itself. It is further recommended to use state-of-the-art data supplied by the manufacturer.