




## Product Technical Info

### TIMING BEL KIT - TBK5099.01

AVVERTENZE SUL CORRETTO MONTAGGIO	WARNING INSTRUCTIONS FOR A CORRECT ASSEMBLY
<p><b>Operazioni di smontaggio:</b></p> <ol style="list-style-type: none"> <li>1) allentare la pompa dell'acqua;</li> <li>2) con apposito utensile ruotare in senso <u>antiorario</u> la pompa stessa per scaricare la tensione del vecchio tenditore.</li> </ol> <p><b>Operazioni di montaggio:</b></p> <ol style="list-style-type: none"> <li>1) posizionare la cinghia di distribuzione;</li> <li>2) con lo stesso utensile ruotare la pompa dell'acqua in senso <u>orario</u>, fino a che viene raggiunto il punto di fase del tendicinghia;</li> <li>3) serrare i bulloni della pompa dell'acqua;</li> <li>4) ruotare manualmente il motore di due giri e controllare che le tacche di fasatura siano allineate;</li> <li>5) allentare nuovamente la pompa dell'acqua;</li> <li>6) ripetere le operazioni 2 e 3.</li> </ol>	<p><b>Disassembly operations:</b></p> <ol style="list-style-type: none"> <li>1) loosen the water pump;</li> <li>2) use a suitable tool to rotate the same pump anticlockwise to relieve tension from the old tensioner.</li> </ol> <p><b>Assembly operations:</b></p> <ol style="list-style-type: none"> <li>1) position the timing belt;</li> <li>2) using the same tool, rotate the water pump clockwise, until the tensioner is timed;</li> <li>3) tighten the water pump bolts;</li> <li>4) manually rotate the engine by two turns and make sure that the timing notches are aligned;</li> <li>5) loosen the water pump again;</li> <li>6) repeat operations 2 and 3.</li> </ol>

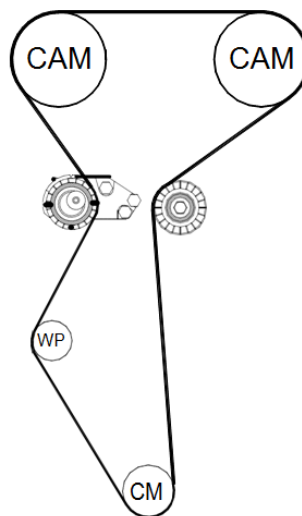

I suggerimenti e/o lo schema di montaggio eventualmente presente sono solo a titolo indicativo. La EXO Automotive Spa non si assume alcuna responsabilità derivante da eventuali errori e/o omissioni e/o modifiche successive apportate al sistema da parte del Costruttore del veicolo. Si consiglia altresì di avvalersi dei dati aggiornati forniti da quest'ultimo.

Recommendations and/or assembly diagram shown here are only for explanation purposes. EXO Automotive Spa doesn't accept any responsibility due to any later error and/or omission and/or modification made by the vehicle manufacturer to the system itself. It is further recommended to use state-of-the-art data supplied by the manufacturer.