
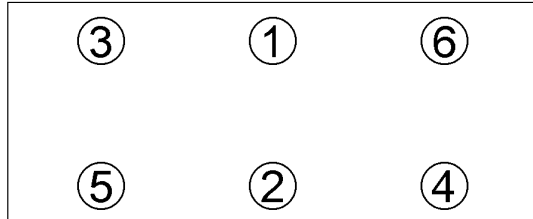


Anziehvorschrift für Zylinderkopf	182.790	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		

Schraubenkopf / Head shape
Tête de vis / Cabeza de tornillo

Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete



Anziehen/	*	29 Nm
Tightening/		69 Nm
Serrage/	<input type="checkbox"/>	1 - 2: 34 Nm
Apriete	<input type="checkbox"/>	3 - 6: 15 Nm
	➤	1 - 6: 90°
	➤	1 - 6: 90°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
<input type="checkbox"/>	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Durchm. 89,0 mm
 Mot. EJ16 1,6i 4WD 1597 ccm SOHC 16V
 Impreza GC, GF 1992-
 Mot. EJ18 1,8i 4WD 1820 ccm SOHC 16V
 Legacy BC, BJF 1989- Impreza GC, GF 1992-

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

182.790