
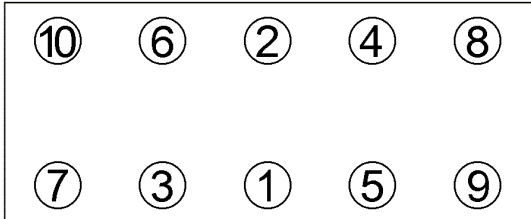


<b>Anziehvorschrift für Zylinderkopf</b>	<b>217.052</b>	
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
	passend für / suitable for adaptable à / adaptable a	<b>Fiat/Alfa Romeo</b> Das Original

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



374.270  
M12X1,25X224



- Anziehen/ \* 62 - 68 Nm
- Tightening/ ► 90°
- Serrage/ ► 90°
- Apriete ► 90°

Zeichenerklärung / Explanations / Explication / Explicación

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
►	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

± 0,82 mm, Ø 83 mm

Stilo, GT    ab 2004→

Croma, 147, 159    ab 2005→

Mot.: 937A5.000, 939A2.000, 937A8.000,  
937A4.000, 192B1.000, 192A5.000

1,9 Ltr. Diesel JTD 16 V

ElingKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	<b>*217.052*</b>
---	------------------