
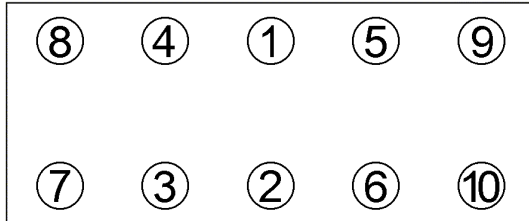


Anziehvorschrift für Zylinderkopf	456.710	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		
	passend für / suitable for adaptable à / adaptable a	Renault

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



Anziehen/ Tightening/ Serrage/ Apriete	* ▶	Clio, Twingo, Modus 25 Nm 25 Nm 270° ±10°	* ▶	Kangoo 25 Nm 25 Nm 225° ±10°
---	--------	--	--------	---------------------------------------

Zeichenerklärung / Explanations / Explication / Explicacion

* ★ □ ● ▶	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 77,5 mm; \pm : 0,9 mm

Mot: K9K 714, 718, 740, 766, 768, 800

1,5 ltr. dCi

47-63 kW (64-86 PS)

Clio, Twingo, Modus, Kangoo

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

456.710