

Montageanleitung

Runder verstellbarer LED-Spot

Mounting instructions

Round adjustable spotLED

Instructions de montage

SpotLED rond orientable

Monteringsanvisning

Rund justerbar SpotLED

Montagehandleiding

Ronde verstelbare SpotLED

Instrucciones de montaje

SpotLED redondo orientable

Istruzioni di montaggio

SpotLED rotondo orientabile

Asennusohje

Pyöreä suunnattava spotled



Lieferumfang
Kit includes
Fourniture

Leveransomfattning
Inhold set

Volumen del suministro
Dotazione di fornitura

A

1 x



1 x



2JA 343 790-...

B


1 x



1 x







1 x




2JA 343 790-...

3

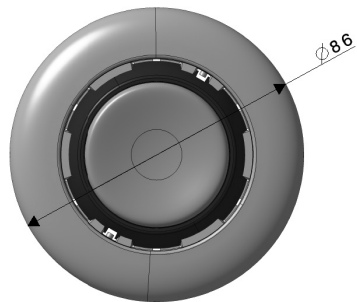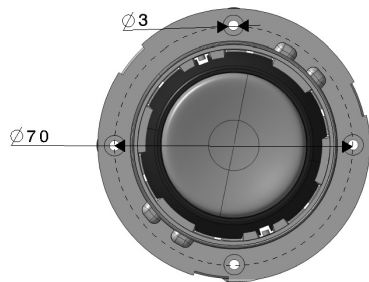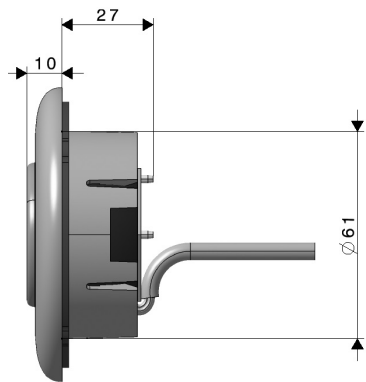

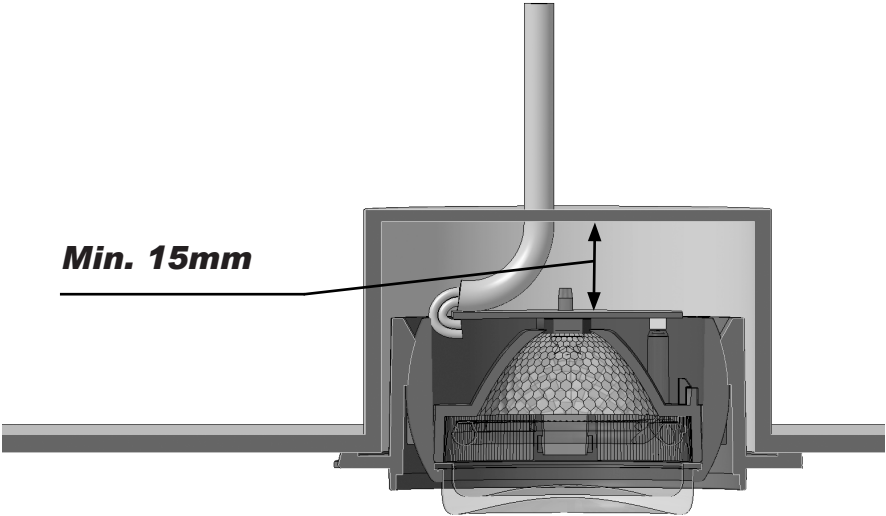


5

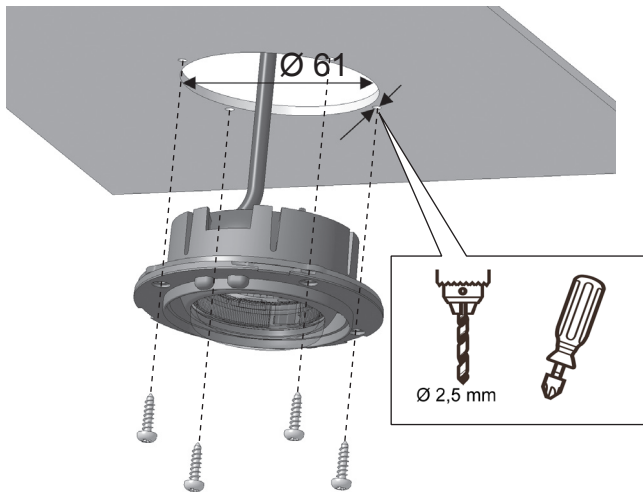

Nicht im Lieferumfang enthalten
Not included with kit
Non fournis
Ingår ej i leveransen
Worden niet meegeleverd
No se incluyen en el suministro
Non in dotazione
Eivät kuulu toimitukseen



M max 1.5 Nm





4 X






**ø2,9 mm
DIN 7981**

A

6

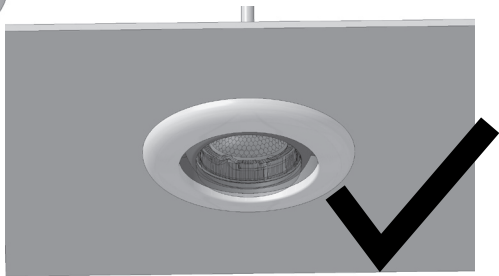
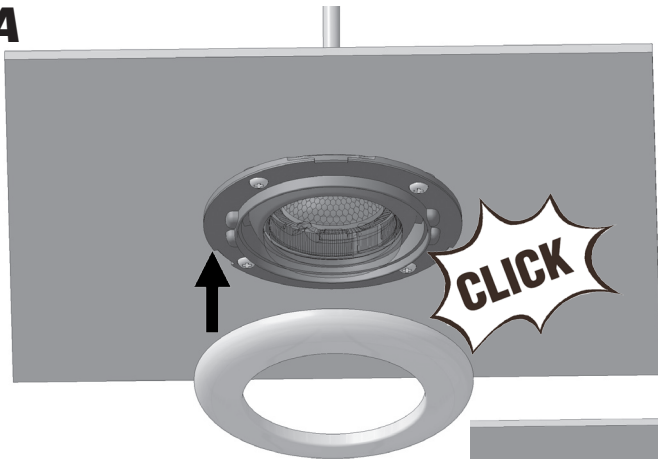


B

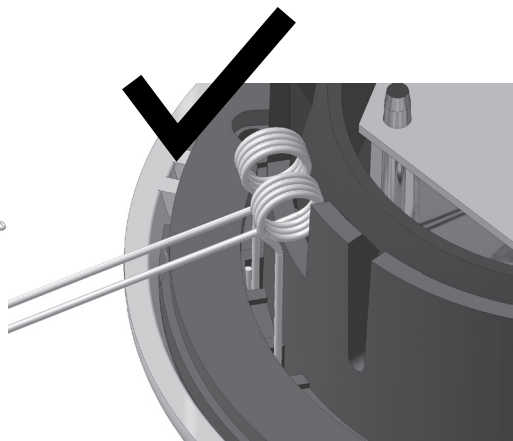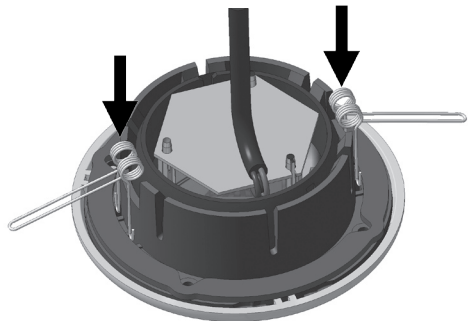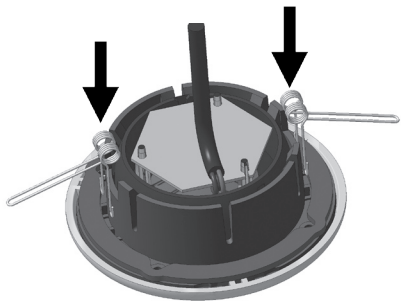

7

8

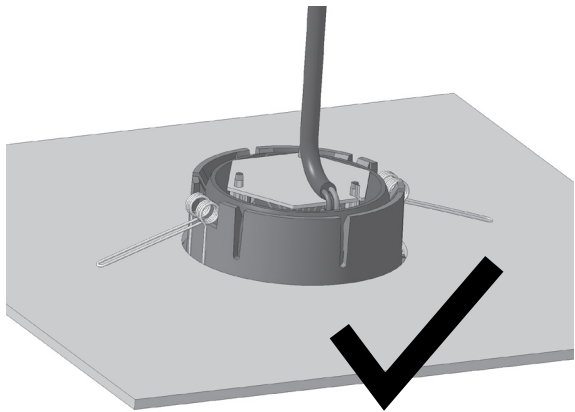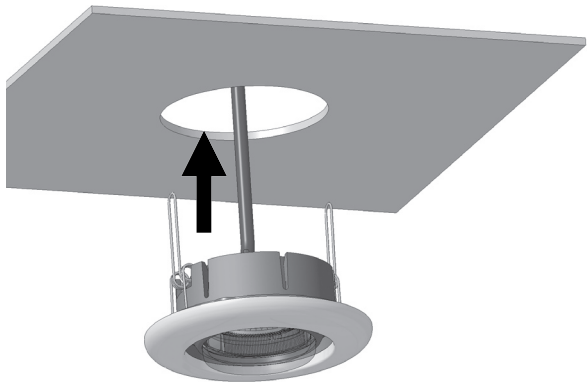

Ground - = Blau, Blue, bleu, blå, blauw, azul, blu, sininen

Ambient + = Braun, brown, brun, brun, bruin, marrón, marrone, ruskea

Spot + = Rot, red, rouge, röd, rood, rojo, rosso, punainen

| Technische Daten | | Runder verstellbarer LED-Spot |
|------------------------------------|---|-------------------------------|
| Art.-Nr. | 2JA- | 343 790-... |
| Eingangsspannung Stromverbrauch | | 9-32 V 3 W |
| Materialien | Gehäuse: ABS, Kugel: ABS, Lichtscheibe: PC, Reflektor: PC, Rahmen: ABS oder Stahl | |
| IP Klasse | 3X | |

| Technical Data | | Round adjustable Spotted |
|------------------------------------|---|--------------------------|
| Part No | 2JA- | 343 790-... |
| Input voltage Power consumption | | 9-32 V 3 W |
| Materials | Housing: ABS, Ball: ABS, Lens: PC, Reflector: PC, Bezel: ABS or Steel | |
| IP Class | 3X | |

| Données Techniques | | Spotted rond orientable |
|----------------------------------|--|-------------------------|
| Référence | 2JA- | 343 790-... |
| Tension d'entrée Consommation | | 9-32 V 3 W |
| Matériaux | Boîtier: ABS, Bille: ABS, Voyant: PC, Réflecteur: PC, Enjoliveur: ABS ou Acier | |
| Classe IP | 3X | |

| Teknisk Information | | Rund justerbar spot-LED |
|---------------------------------|---|-------------------------|
| Artikelnr | 2JA- | 343 790-... |
| Inspänning Effektförbrukning | | 9-32 V 3 W |
| Material | Kåpa: ABS, Klot: ABS, Lins: PC, Reflektor: PC, Infattning: ABS eller Stål | |
| IP klass | 3X | |

| Technische Gegevens | | Ronde verstelbare spotted |
|--|--|---------------------------|
| Artikelnr. | 2JA- | 343 790-... |
| Ingångsspänning Opgenomen ver- mogen | | 9-32 V 3 W |
| Materialien | Huis: ABS, Bol: ABS, Lens: PC, Reflector: PC, glasring: ABS of Staal | |
| IP Klasse | 3X | |

| Datos Técnicos | | Spot LED redondo orientable |
|---|---|-----------------------------|
| Nºde artículo | 2JA- | 343 790-... |
| Tensión de entrada Consumo de cor- riente | | 9-32 V 3 W |
| Materiales | Caja: ABS, Bola: ABS, Lente: PC, Reflector: PC, Pantalla: ABS o Acero | |
| Clase IP | 3X | |

| Dati Tecnici | | Spotted rotondo orientabile |
|--|---|-----------------------------|
| N. art. | 2JA- | 343 790-... |
| Tensione di ingresso Assorbimento di potenza | 9-32 V 3 W | |
| Materiali | Scatola: ABS, Sfera: ABS, Lente: PC, Riflettore: PC, Cornice: ABS o Acciaio | |
| Classe IP | 3X | |

| Tekniset Tiedot | | Pyöreä suunnattava spotted |
|------------------------|--|----------------------------|
| Tuotenro. | 2JA- | 343 790-... |
| Jännite Teho | 9-32 V 3 W | |
| Materiaalit | Runko: ABS, Kuula: ABS, Lasi: PC, Heijastaja: PC, Kehys: ABS tai Teräs | |
| IP Luokka | 3X | |