
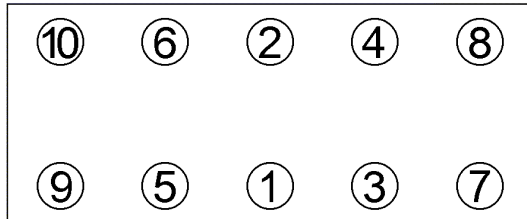


|  |   |   |
|--|---|---|
| <b>Anziehvorschrift für Zylinderkopf</b>         | <b>528.000</b>  | <br>Das Original |
| <b>Tightening Instructions for Cylinder Head</b> |   |   |
| <b>Instructions de serrage pour culasse</b>      |   |   |
| <b>Prescripciones de apriete para culatas</b>    |   |   |
|  | passend für / suitable for<br>adaptable à / adaptable a | <b>Nissan</b>   |

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



Anziehen/  
Tightening/    \*    29 Nm  
Serrage/        78 Nm  
Apriete        □    29 Nm  
                         74-83 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

|        |   |                              |                                |                                       |
|--------|---|------------------------------|--------------------------------|---------------------------------------|
| *    □ | neue Zylinderkopfschrauben verwenden        | use new cylinder head bolts  | utiliser des vis neuves        | emplar tornillos nuevos               |
| ★      | Warmlauf (80°C)                             | warm up time (80°C)          | chauffage (80°C)               | calentamiento (80°C)                  |
| □      | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | aflojar y apretar tornillo a tornillo |
| ●      | Setzzeit                                    | relaxation time              | durée de tassement             | tiempo de espera                      |
| ➤      | Drehwinkel                                  | torque angle                 | angle de serrage               | ángulo de giro                        |

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Terrano/Wagon/Pick up (D21) 03.86-04.92  
MC Z24I 2,4i 74 KW

Urvan (E24) 05.89-09.93  
MC Z24I 2,4i 74 KW

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*528.000\***