
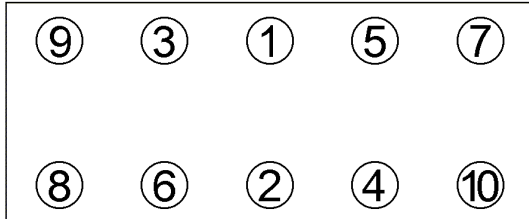


Anziehvorschrift für Zylinderkopf	920.657	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		
	passend für / suitable for adaptable à / adaptable a	Nissan

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



710.040
M 11 x 111



Anziehen/ Tightening/ Serrage/ Apriete	CA 18 D/DE	CA 18 DT
* <input checked="" type="checkbox"/>	29 Nm	* 29 Nm
	103 Nm	103 Nm
<input type="checkbox"/>	29 Nm	<input type="checkbox"/> 29 Nm
►	85° - 90°	103 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

* <input checked="" type="checkbox"/>	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
* <input checked="" type="checkbox"/>	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
<input type="checkbox"/>	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
►	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 85, 5mm

Mot: CA18D, CA18DE, CA18DET

1,8 ltr.

92-124 kW (125-169 PS)

200 SX, Bluebird, Sunny II

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

920.657