



THE NETHERLANDS



EEC TYPE-APPROVAL CERTIFICATE

Communication concerning the:

- type-approval
- extension of type approval
- refusal of type approval
- withdrawal of type approval

of a type of a component (towbar) with regard to Directive (94/20/EEC)

Type-approval number: e4*94/20*0941*00

Reason for extension:

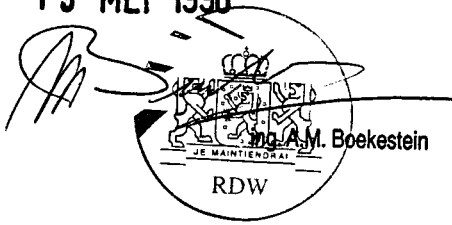
SECTION I

- 0.1 Make (trade name of manufacturer) : Le Rapide
- 0.2 Type and general commercial description(s) : 020532
- 0.3 Means of identification of type marked on the component : Approval number
- 0.3.1. Location of the marking : on type plate
- 0.5 Name and address of manufacturer : Bosal le Rapide
Avenue des Monts Champagne
51490 Beine Nauroy/France
- 0.7 In the case of components and separate technical units, location and method of affixing of the EEC approval mark : on type plate
- 0.8 Name(s) and address(es) of assembly plants : See information document (annex III, item 0.8)



Type-approval number : e4*94/20*0941*00

SECTION II

1. Additional information (where applicable) : see Appendix I
2. Technical service responsible for carrying out the tests : RDW
Testbaan|Centrum
Talingweg 76
8218 NX Lelystad
3. Date of testreport : 30-03-1998
4. Number of testreport : TCL-94/20-370/97
5. Remarks (if any) : see Appendix I
6. Place : Zoetermeer
7. Date : 19 MEI 1998
8. Signature : 
9. The index to the information package lodged with the competent authority that has granted type-approval, which may be obtained on request, is attached.
 - Application form relating to annex III and annexed drawings
 - Drawings and instructions for attachment
 - Fitting instructions
 - Test report as mentioned in item 4.

Appendix I
to EEC type-approval certificate No : e4*94/20*0941*00
concerning the components type-approval of mechanical coupling devices with regard to
Directive 94/20/EEC

1. Additional information
- 1.1. Class of the type of coupling : A50-X
- 1.2. Categories or types of vehicles for which the device is designed or restricted : see fitting instructions
- 1.3. Maximum D-value : 5.19 kN
- 1.4. Maximum vertical load S at the coupling point : 50 kg
- 1.5. Maximum load U at the fifth wheel coupling point : ----- ton
- 1.6. Maximum V-value : ----- kN
- 1.7. Instructions for attachment of the coupling type to the vehicle and photographs or drawings of the fitting points at the vehicle given by the manufacturer; additional information if the use of the coupling type is restricted to special types of vehicles : see fitting instructions
- 1.8. Information on the fitting of special towing brackets or mounting plates : see fitting instructions

5. Remarks : The installation of the coupling device to the vehicle must be checked according to requirements of Annex VII, see Annex I, par.5.10.

