


DONNEES TECHNIQUES

Position	côté roue
Denture extérieure, côté roue	28
Denture intérieure, côté roue	30
Nombre de dents, anneau ABS	44
pour véhicule avec système antiblocage	
Diamètre de l'épaulement [mm]	56
Position du clip de maintien	Intérieur

PHOTOS

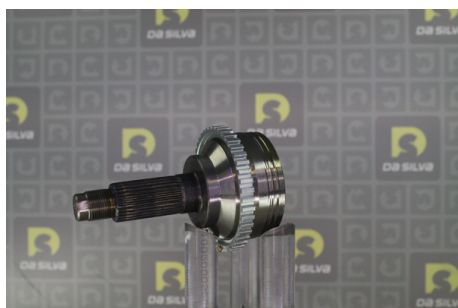

APPLICATIONS

MAZDA		
323 (98-04) F (BJ) - 2.0 TD	90 ch	09.1998 > 01.2001
323 (98-04) S (BJ) - 2.0 TD	90 ch	09.1998 > 05.2004
626 (98-02) (GF) - 1.8	90 ch	05.1997 > 12.1999
	100 ch	12.1999 > 10.2002
626 (98-02) (GF) - 2.0	115 ch	05.1997 > 10.2002
	136 ch	04.1998 > 10.2002
626 (98-02) Break (GW) - 1.8	90 ch	02.1998 > 01.2000
	100 ch	01.2000 > 10.2002
626 (98-02) Break (GW) - 2.0	116 ch	02.1998 > 10.2002
626 (98-02) Hatchback (GF) - 1.8	90 ch	05.1997 > 12.1999
	100 ch	12.1999 > 10.2002
626 (98-02) Hatchback (GF) - 2.0	115 ch	05.1997 > 10.2002
626 (98-02) Hatchback (GF) - 2.0 H.P.	136 ch	02.1998 > 10.2002