

E

INSTRUCCIONES DE MONTAJE

Para instalar correctamente el elevavinas, haga lo siguiente:

- Desmonte el panel puerta con cuidado y extraiga el antiguo elevavinas, debe desconectarlo mecánicamente y eléctricamente.
- Introduzca el elevavinas de recambio en la puerta en el espacio específico "1".
- Fije la guía del elevavinas en la puerta en los puntos "2".
Nota: no hace falta fijar el motor a la puerta pues el mismo es solidario a la guía.
- Conecte el elevavinas eléctricamente. Si la conexión eléctrica del elevavinas no es compatible con la del vehículo, siga las instrucciones para la conexión eléctrica.
- Enganche el cristal en el elevavinas.
- Compruebe el funcionamiento general. Si fuese necesario, regular el acoplamiento cristal-elevavinas aprovechando los orificios ovalados (ver A). Vuelva a montar el panel de la puerta

Grazias por haber elegido nuestros productos.


GB

ASSEMBLY INSTRUCTIONS

To install the window regulator:



- Disassemble the door: carefully disconnect the old window regulator mechanically and electrically and remove it.
- Place the new window regulator in the door through the opening "1".
- Attach the guide of window regulator to points "2".
N.B. It is not necessary to attach the motor to the door panel as it is fixed to the rail.
- Connect the window regulator to the car's electrics. If the window regulator's electrics are not compatible with those of the car, follow the instructions for the electrical connection.
- Attach the car window glass to the window regulator.
- Check overall functioning. If necessary, use the slotted holes (point "A") to adjust the coupling between the glass and the window lifter. Reassemble the door.

Thank you for choosing our products.

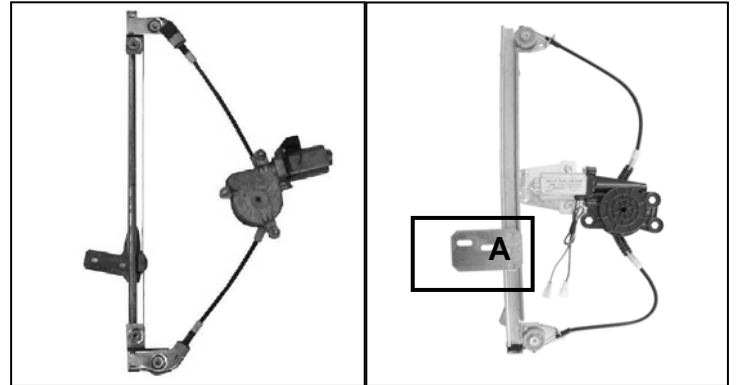

Elevavinas original
Oem window regulator

Nuestro elevavinas
Our window regulator

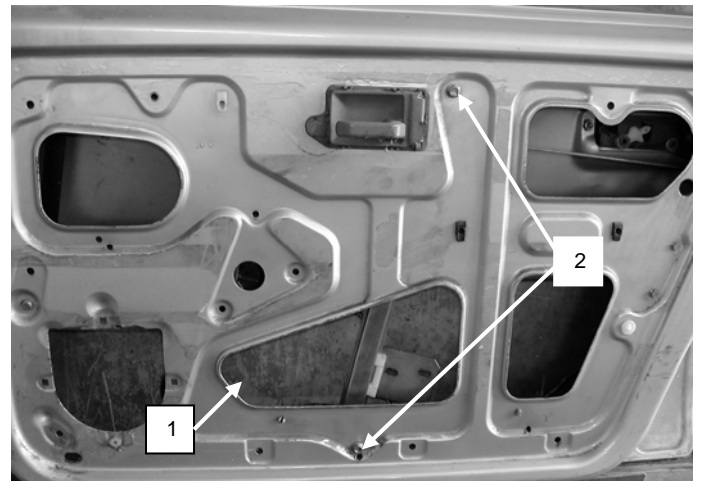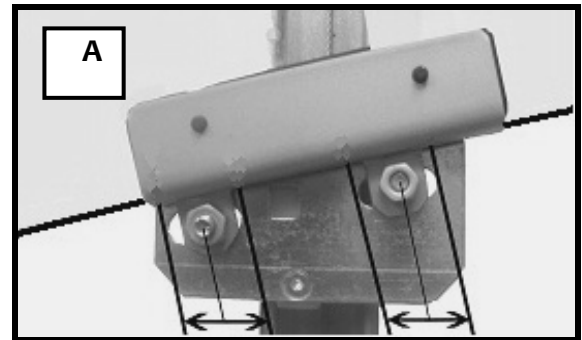

Puerta lado derecho, Right front door