
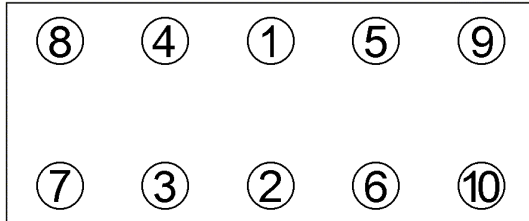


<b>Anziehvorschrift für Zylinderkopf</b>	<b>984.275</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
	passend für / suitable for adaptable à / adaptable a	<b>Renault</b>

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



759.180  
M 12 x 113



Anziehen/	*	30 Nm
Tightening/	➤	80°±4°
Serrage/	●	3 min
Apriete	□	lösen/loosen desserrer/aflojar
	➤	25 Nm + 213°±7°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Ø: 81 mm;  $\pm$ : 1,85 mm; 3 Löcher/Holes/Trous

Mot: F8Q 610, 620, 624, 640, 682, 706, 710, 714  
722, 724, 730, 732, 742, 764, 774, 776

1,9 Ltr. D; 44-48 kW (60-65 PS)

R19, Clio, Megane, Rapid

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*984.275\***